






TECHNICAL INFORMATION Watts: Input Power: AC:220-240V, 50/60Hz Unit Color: Silver Body Type: Aluminium Operation Temperature: -20°C to +45°C Rated Load: Max 29-45W Dimension: 455x52x33mm Output Voltage: DC:30-42V **Emergency Standby Watts:** 10 Battery Type: Ni-Cd 7.2V, 4000mAh Charging Time: 24 hours Working Time: 3 Hours Emergency Operation Time: >3 Hours

EMERGENCY PACK-29W TO 45W | LED LIGHTING

V-TAC's LED Lighting range includes lighting that fulfills the needs of various end-users and industries, offering efficient and innovative products that provide modern solutions at an affordable price. We are proud to also provide an extended multi-year warranty on our products, as well as detailed support.

One brand, endless solutions..

SKU: 60303 - 1567 1246 View more details

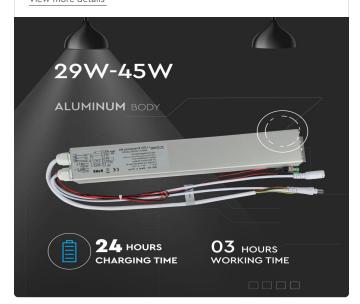







FEATURES

- Reliable 3 Hours emergency operation time
- Sealed Ni-cd battery guarantees high efficiency and lifecycle
- Output power max 10W
- AC wire Length 35cm DC wire length 40 cm
- Wire length of LED Indicator and Test button 60 cm

C€/EMC C€/LVD





PACKAGING

Gross Weight (Kgs): 1.09
Unit CBM: 0.003276
Dimension: 455x52x33mm

MASTER BOX PACKAGING

Box Qty: 12 Qty Per Pallet: 480 Length (Box) mm: 510 Width (Box) mm: 75 Height (Box) mm: 45

LISTING DETAILS

Commodity Code: 9405403990 Ean Code: 3800157617451